


		S	M/L	XL
TECHNIC SPEED STEEL	A [cm/in]	65-80 / 25-31	75-100 / 29-39	85-130 / 33-51
m [g]	B [cm/in]	45-60 / 18-24	50-75 / 19-29	50-75 / 19-29
M/L = 2450	C [cm/in]	150-170 / 59-67	160-180 / 63-70	175-205 / 68-80
EXPERT SPEED STEEL	A [cm/in]	65-80 / 25-31	75-100 / 29-39	85-130 / 33-51
m [g]	B [cm/in]	45-60 / 18-24	50-75 / 19-29	50-75 / 19-29
M/L = 2685	C [cm/in]	150-170 / 59-67	160-180 / 63-70	175-205 / 68-80
SIT W. SPEED STEEL	A [cm/in]	65-80 / 25-31	75-100 / 29-39	85-130 / 33-51
m [g]	B [cm/in]	45-60 / 18-24	50-75 / 19-29	50-75 / 20-29
M/L = 1650	C [cm/in]			

SIT W. SPEED STEEL	NFPA class II life safety harness	EN standard			
C	head up	16 kN	rappel/positioning attachment element	15 kN	EN 813:2008
	head down	NO		NO	
D	head up	13 kN	positioning only attachment	15 kN	EN 358:1999
	head down	NO		NO	

TECHNIC SPEED STEEL	EXPERT SPEED STEEL	ANSI Z359.1-2007	NFPA class III life safety harness	EN standard			
A	head up	22,2 kN	Fall arrest attachment element	16 kN	Fall arrest attachment element	15 kN	EN 361:2002
	head down	NO		10 kN	attachment element	10 kN	EN 361:2002
B	head up	16 kN	rappel/positioning attachment element 2FT maximum free fall	16 kN	Fall arrest attachment element	15 kN	EN 361:2002
	head down	NO		10 kN	attachment element	10 kN	EN 361:2002
C	head up	16 kN	rappel/positioning attachment element	16 kN	rappel/positioning attachment element	15 kN	EN 813:2008
	head down	NO		10 kN	attachment element	NO	
D	head up	16 kN	positioning only attachment	13 kN	positioning only attachment	15 kN	EN 358:1999
	head down	NO		NO	attachment	NO	
E	head up					15 kN	EN 1497:2007
	head down					NO	

SIT WORKER

SPEED STEEL




label location **L**

This harness meets the life safety harness requirements of NFPA 1983, standard on life safety rope and equipment for emergency services, 2017 edition; class II.

TECHNIC SPEED STEEL

EXPERT SPEED STEEL

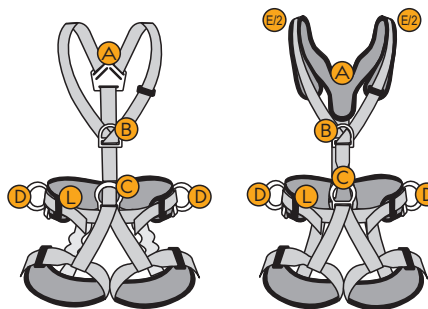

This harness meets the life safety harness requirements of NFPA 1983, standard on life safety rope and equipment for emergency services, 2017 edition; class III.

Directive / směrnice
PSA 89/686/EEC, Nař. vlády 21/2003 Sb.
Certified by / certifikoval
VVÚU, a.s. Ostrava-Radvanice, Pikartská 1337/7, ČR
EC QMS of production inspected by / ES SRK
výrobce prováděje
VVÚU, a.s. Ostrava-Radvanice, Pikartská 1337/7, ČR
NFPA Life safety harness – class III ANSI Z359.1 – 2007
Approved by
VVÚU, a.s. Ostrava-Radvanice, Pikartská 1337/7, ČR

CE 1019
EN 358:1999
EN 361:2002
EN 813:2008

SINGING ROCK TRACEABILITY LABEL / ETIKETA SLEDOVATELNOSTI



1 EN unique No. | CZ jedinečné číslo | DE Eindeutige nummer | FR Numéro unique | ES Número único
2 batch No. | výrobní číslo | Chargennummer | Numero de lot de fabrication | No. de serie
3 month/year of manufacture | měsíc/rok výroby | produktion monat/jahr | mois/année de fabrication | mes/año de producción
4 model / vzor | Model | le modèle | modelo
5 size | velikost | Größe | taille | talla
6 product code | označení produktu | Produktcode | code de produit | código de producto
7 producer | výrobce | Hersteller | Le fabricant | fabricante
8 european standard | evropská norma | Europäische Norm | La norme europeenne | Normativa europea
9 conformity marking / no. of notified body | značka shody / č. notifikované osoby | Zertifikat / Nummer des zertifizierenden Instituts | la marque de confirmat / Num ro de bureau notifi | marca de conformidad / numero del organismo notificado



EN Reading and understanding instruction for use are required to use this product.
CZ Bez důkladného pročtení a pochopení návodu k použití nepoužívejte tento výrobek.
DE Das Lesen und Verstehen der Bedienungsanweisung ist Voraussetzung für die Nutzung des Produkts.
FR Sans avoir lu attentivement ce mode d'emploi, n'utilisez pas ce produit.
ES Es necesario leer y comprender las instrucciones de uso de este producto.



EN 3 years guarantee.
CZ 3 roky záruka.
DE 3 Jahre Garantie.
FR La garantie de 3 ans.
ES 3 años de garantía.

ver. 16597020404 0318

SINGING ROCK s.r.o.

Poniklá 317 • 514 01 Poniklá • Czech republic
Tel. +420 481 585 007 • email: info@singingrock.cz
www.singingrock.com



singingrock.page



singingrock_official



LIFE SAFETY HARNESS



! WARNING !

The technical information accompanying this product must be used and understood before use. Failure to follow these warnings increases the risk of injury or death. Use and inspect the harness following the manufacturer's instructions. This product must be inspected prior to each use. Do not use the product subjected to impact forces. Any modifications or repair outside of our production facilities is forbidden. Do not remove this label.

User Information

- 1) Inspect the harness periodically according to Singing Rock inspection procedure (see included Guide).
- 2) Remove the harness from service and dispose of carefully, if the harness does not pass the inspection or if there is any doubt about it's safety or serviceability.
- 3) Do not expose the harness to flame of high temperatures and carry the harness where it will be protected as the harness could melt or burn and fail if exposed to flame or high temperature.
- 4) Any modification or repair outside of our production facilities is forbidden.
- 5) Keep the product labels and user information/instruction after they are removed/separated from the harness and retain them in the permanent harness record. Copy the product labels and user information/instruction and keep the copies with the harness.
- 6) Refer to user information/instruction before and after each use.
- 7) You can be killed or seriously injured if you do not read, understand and follow user instruction/information.
- 8) Additional information regarding safety can be found in NFPA 1500, Standard on Fire Department Occupational Safety and Health Program and in NFPA 1983, Standard on Life Safety Rope and Equipment for Emergency Services.

Guide on how to inspect your life safety Harness

Definitions

Webbing is woven surface textile of a specific width with edges that do not unravel;

seam is solid connection of surface textiles by threads, which consists of stitches;

stitch is part of a seam between two pricks that is formed by upper and lower thread;

metal parts are metal buckles and other components of various shapes – especially fixing, setting and connecting devices.

How old is the harness

Find this product label or label permanently stitched on the harness.

Is your harness in a good shape?

Keep the records of any events while using the harness. If the harness sustained high factor fall put it out of the service. If the signs of wear or damage specified below are visible, do not use the harness anymore.

If the harness is more than 10 years old from the date of manufacture or 5 years old from the date of first use, do not use the any further.

Inspection of Webbing

The inspection is necessary to be done also on less accessible parts, especially on edges and spots where the webbing touches metal devices of the harness.

If any yarn is completely broken (cut or worn through), discard the harness from further use. It is especially important to pay attention to both edges of the webbing where the risk of breaking is highest. Filaments in a yarn can be damaged in such a way that the yarn as a whole is not damaged (roughness of webbing). It is not necessary to discard the harness from further use unless the yarn that protects the edge of webbing from unravelling is damaged. Local colouring (stains spots, etc.) wash in the lukewarm water. If the stains or spots do not disappear, damage was caused by unknown chemical, put the harness out of service at once. Glossy surface also suggests putting the harness out of service immediately. High temperatures are permanently damaging to synthetic fibres.

Inspection of Seam

The inspection is necessary to be done also on less accessible parts of the harness. The basic characteristic of a safety stitch is that no thread (or stitch) is broken, cut, worn through or unravelled. It is also important to check the right and wrong side.

The stitching interruption should be accepted only at conditions, when the sewing threads terminations are sealed from Singing Rock production. If any thread in a seam is completely broken (cut or worn through) and the thread ends are not sealed put the harness out of the service.

If the seam is rough and one of the three yarns is observed under the magnifier completely broken, it is necessary to discard the harness from further use promptly.

Local colouring (stains, spots, etc.) wash in the lukewarm water. If the stains or spots do not disappear, damage was caused by unknown chemical, put the harness out of service at once. Glossy surface also suggests putting the harness out of service immediately. High temperatures are permanently damaging synthetic fibres.

All the seams in the harness must have the terminations sealed in such a way that a loose end of the thread is not longer than 2 mm and the visible sealed end prevents the seam from spontaneous unravelling. If the loose end of the thread is longer than 8 mm it is necessary to discard the harness from further use because it means that more than two stitches unravel. A loosened stitch is also a reason for discarding the harness from use. A loosened stitch means a loose loop of a stitch that allows inserting a rounded wire with a diameter of 2 mm into it.

Inspection of metal parts

The basic characteristic of safety metal devices is no deformation, and smooth surface without any cracks. If a permanent deformation is visible or the reduction of the original size of the metal device is more than 5 %, do not use the harness anymore. Corrosion and oxidation of metal devices that do not disappear after washing the harness in lukewarm soap water can be described as chemical damage, discard the harness from further

use at once.

Reduction of function is important to be checked especially if two devices fit into each other. The function of metal devices is reduced if it can be opened unintentionally or if it does not fit the original requirements. In this case put the harness out of the service.

A B EN 361:2002

Use for fall arrest purposes. Component part of a fall-arrest system.

Verwendung als auffanggurt. Teil eines Auffangsystems.
Použití pro zachycení pádu. Součástí systému zachycení pádu.
Uzycie dla zatrzymywania upadku. Część sposobu chwytania upadku.

Utilizzo come imbracatura antiscaduta. Componente di un sistema d'arresto anticaduta.

Utilisation en harnais antichute, composante d'un système d'arrêt des chutes.

Utilización como arnés anticaída. Componente de un sistema anticaídas.

C EN 813:2008

Use as sit harness.

Sit harness alone is not suitable for fall arrest purposes.

Verwendung als Sitzgurt.

Sitzgurt allein ist nicht geeignet zu verwenden als auffangerat.

Použití jako sedací pracovní úvaz.

Sedací úvaz samotný není určen pro zachycení pádu.

Uzycie oraz uprzaz biodrowa robocza.

Upraz biodrowa nie jest przystosowana do wykonywania celowych upadków.

Utilizzo come imbracatura bassa professionale.

Imbracatura bassa professionale non deve essere utilizzato come anticaduta.

Utilisation en harnais cuissard professionnel.

Harnais cuissard professionnel ne doit pas être utilisé comme antichute.

Utilización como arnés profesional de cintura.

Arnés profesional de cintura no debe se utilizado como un quipo anticaída.

D EN 358:1999

Use as work positioning harness (maximum length of fall: 0.5 m).

Component part of a work positioning system – not use as fall arrester!

Verwendung als Ruckhaltegurt (maximale struzhole: 0,5 m).

Teil eines Ruckhaltegurt – nicht als auffangerat verwenden!

Použití jako polohovací pás (maximální délka pádu: 0,5 m).

Kotvicí prvky na polohovacím pasu – nepoužívat pro zachycení pádu!

Uzyciew pozycyj roboczej (maksymalna długość upadków 0,5 m).

Komponenty pozycyjne – nie używać do wykonywania celowych upadków!

Utilizzo come cintura di sostegno (altezza di caduta massima: 0,5 m).

Componente di un sistema di sostegno da lavoro – non deve essere utilizzato come anticaduta!

Utilisation en ceinture de maintien (hauteur de chute maximum: 0,5 m).
Composante d'un système de maintien au travail – ne doit pas être utilisé comme antichute!
Utilización como cintura de sujeción (altura máxima de caída: 0,5 m).
Componente de un sistema de sujeción no debe ser utilizado como un equipo anticaída!

E EN 1497:2007

Personal fall protection equipment – Rescue harnesses.

Persönliche Absturzschutzausrüstungen – Rettungsgurte.

Prostředky ochrany osob proti pádu – Záchranné postroje.

Sprzęt ratowniczy – Szelki ratownicze.

Dispositivi individuali per la protezione contro le cadute –

Imbracature di salvataggio.

Equipment de protection personnel contre les chutes – Harnais de sauvetage.

Equipo de salvamento – Arneses de salvamento.

